


ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0256

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.

Hardware Package (included):

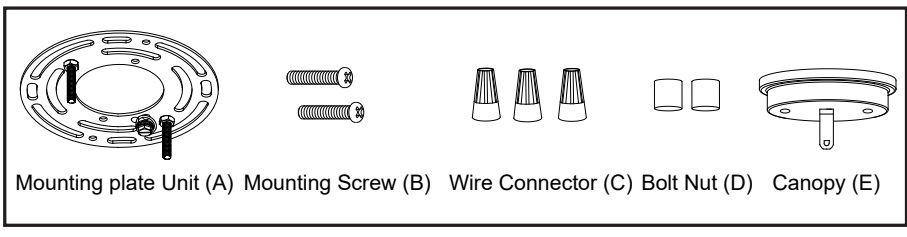

Installation Steps

Turn off the power at fuse or circuit box

1. Attach the mounting plate unit (A) to the outlet box by using two mounting screws (B).
2. Rod connections:
 - a. Thread the fixture wire from the fixture through the lower rod, then secure the lower rod onto the fixture using the threaded pipe.
 - b. Thread the fixture wire through the middle rod, then secure the middle rod onto the lower rod using the threaded pipe.
 - c. Thread the fixture wire through the upper rod, then secure the upper rod onto the middle rod using the threaded pipe.**Note: Length adjustable from 25" to 79". Use fewer rods if shorter length is desired.**


3. Thread the fixture wire through the canopy (E), then secure the rod assembly to the set threaded pipe of the canopy (E).

4. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire to the mounting plate unit (A) with the green ground screw, then connect it to the house ground wire with a wire connector (C).Carefully put the wires back into the outlet box.

5. Attach the canopy to the mounting plate unit (A) by inserting the fixture mounting screws, secure it with two bolt nuts (D).

6. Attach the glass shades onto the glass holders and tighten it with the socket rings.

7. Install 5 x 60W Max. medium base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.

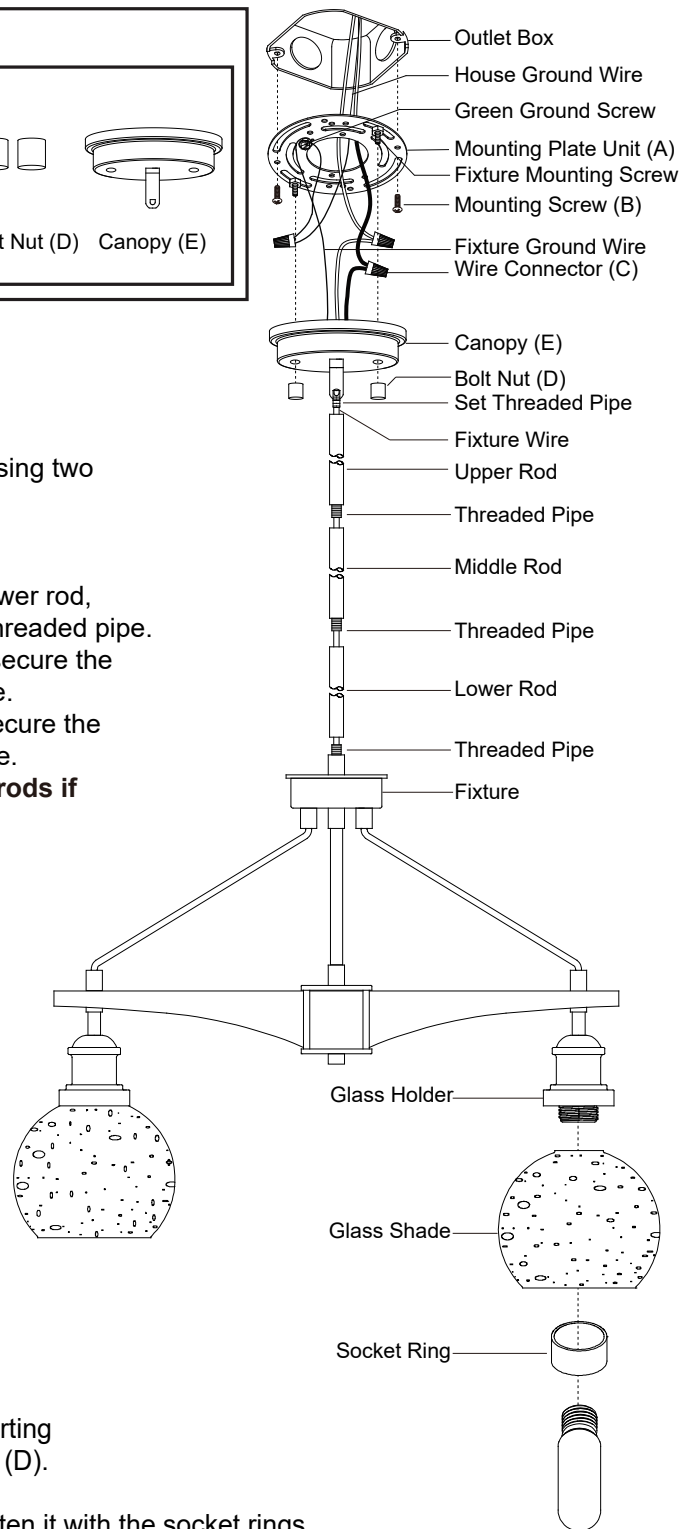


Medium Base Bulb Max.60W
(not included)

 **VAXCEL**

200916

8. Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)

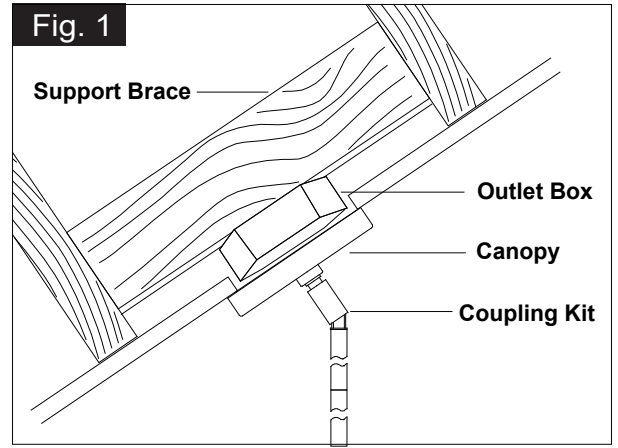

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

Mounting plate Unit (A) Mounting Screw (B) Wire Connector (C) Bolt Nut (D) Canopy (E)


Mounting Hardware 6292MM (1SET)

12"Rod X1 3253RD

6"Rod X1 3254RD

3"Rod X1 3255RD

Glass Shade X1 10198CS

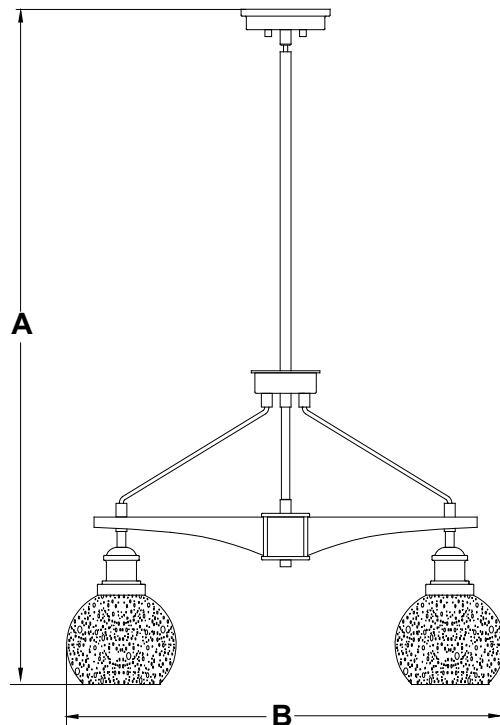

A: 25"~79"
B: 25-1/4"