
EDGEWOOD® SERIES

TF610**-220 Decorative Fan

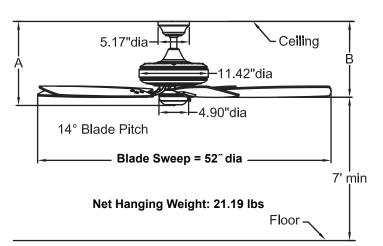

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 220~240 volts AC, 50Hz, 5 amp circuit.

MOTOR SPECS:

188x20-220 motor is designed for optimal performance with this fan.

BLADES:

A set of five 22" reversible traditional wood blades is included.

CONTROL OPTIONS:

Optional C1-220, C2-220, C3-220 and C6-220 wall controls and CR4WH-220 remote control (with receiver units) are available — sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with 1[°] dia. x 4.5[°] long downrod. Optional downrods available in 12[°], 18[°], 24[°], 36[°], 48[°], 60[°], and 72[°] lengths. A downrod coupler is available for installations requiring a downrod longer than 72[°]. Fan can be mounted on a sloped ceiling up to 19[°]. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

| | Α | В |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 13.88″ | 12.52″ |
| Fan w/12" downrod | 21.38″ | 20.02″ |
| Fan w/18" downrod | 27.38″ | 26.02″ |
| Fan w/24" downrod | 33.38″ | 32.02″ |
| Fan w/36" downrod | 45.38″ | 44.02″ |
| Fan w/48" downrod | 57.38″ | 56.02″ |
| Fan w/60" downrod | 69.38″ | 68.02″ |
| Fan w/72" downrod | 81.38″ | 80.02″ |

| Available Finishes | | | | |
|--------------------------------------|----------------|-----------------------|--|--|
| Fan / Housing Assembly Blades - Trad | | Blades - Traditional | | |
| SN | Satin nickel | Walnut / light walnut | | |
| TS | Tortoise shell | Walnut / light walnut | | |
| WH | White | White / white oak | | |

| TUV/GS Efficiency Info (220V) | | | | | |
|-------------------------------|---------|------|-------|--|--|
| Fan Speed | Max RPM | Amps | Watts | | |
| High | 161 | 0.26 | 63 | | |
| Med | 122 | 0.20 | 38 | | |
| Low | 77 | 0.13 | 15 | | |